


- 1 Subbase
- 2 Styrodur® 3035 CS / 4000 CS / 5000 CS
- 3 Separation layer, e.g., PE film
- 4 White tank—floor slab
- 5 White tank—wall, waterproof concrete
- 6 Styrodur® 3035 CS / 4000 CS / 5000 CS
- 7 Styrodur boards full-surface bonded
- 8 Side edges of the Styrodur boards spackled all round with adhesive

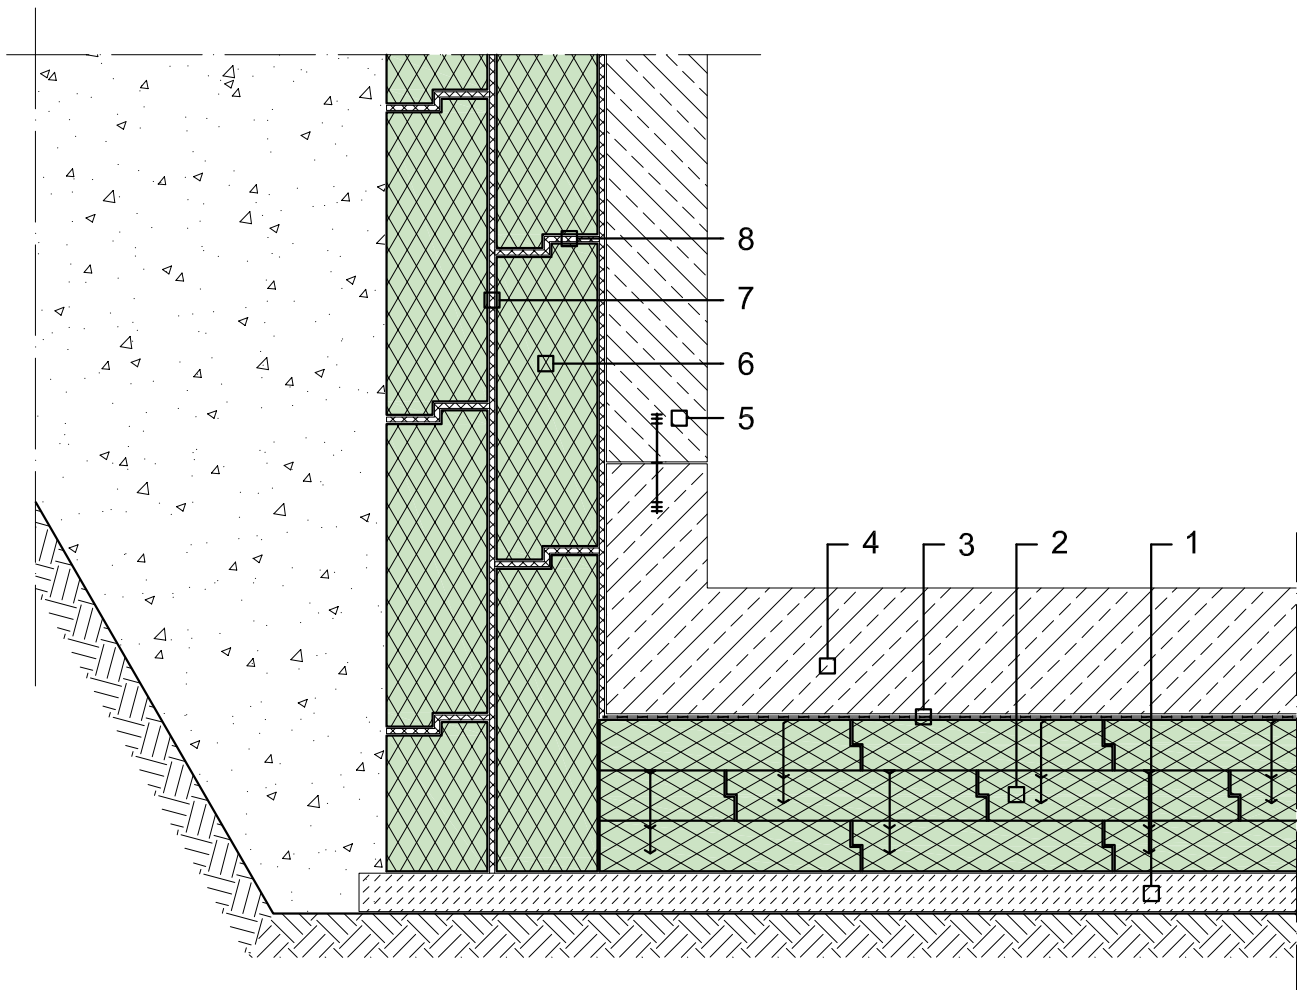

**Note:**

The information submitted in this drawing is based on our current knowledge and experience and is referring only to our product and its properties at the time of going to print. It does not imply any warranty or any legally binding assurance regarding the condition of our product. Attention must be paid to the requirements of specific applications, especially the physical and technological aspects of construction and building regulations. All mechanical drawings are basic outlines and have to be adapted to each application.

Building element:	PB 004	Perimeter insulation—white tank—in groundwater—insulated with multiple layers	
Scale:	1:15	Detail:	White tank
Date:	16.12.14	File:	PB004_Styrodur_C_White_tank_Perimeter_in_groundwater_multiple_layers.dwg